

Radiators

No other radiator range offers you immediate availability, great performance, high standards, attractive design and great value quite like the exclusive range of Center radiators.



Features and benefits

- Most widely stocked own brand radiator in the UK
- Same day collection on our main range
- Available in a wide range of types and sizes
- Compact design and attractive appearance
- Improved sustainable packaging, whilst maintaining robust product protection
- Competitively prices to give unrivalled value
- Quality white (RAL 9016) finish that can be fitted without further painting
- Updated and improved concealed wall mounted brackets (supplied)
- Wall brackets provided with anti-lift clips for added security
- Manufactured and tested in accordance with BS EN 442
- Wide range of spare covers, grilles, vents, plugs & touch up paint available to order direct to branch
- 20 year warranty

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Version number 1.0

Single Convector Type 11 (SG)



Type 11						
Code	Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
706914	300	400	218	744	113	386
706878		1200	655	2235	338	1153
706967	450	400	316	1078	162	553
706955		500	395	1348	203	693
706944		600	474	1617	244	833
706916		700	553	1887	284	969
706934		800	632	2156	325	1109
706923		900	711	2426	365	1245
706937		1000	790	2695	406	1385
706918		1100	869	2965	447	1525
706943		1200	948	3235	487	1662
706939		1400	1106	3774	568	1938
706925		1600	1264	4313	650	2218
706899		1800	1422	4852	731	2494
706889		2000	1580	5391	812	2771
706982	600	400	407	1389	208	710
706987		500	509	1737	261	891
706991		600	611	2085	313	1068
706972		700	713	2433	365	1245
706988		800	814	2777	417	1423
706976		900	916	3125	469	1600
706983		1000	1018	3473	521	1778
706974		1100	1120	3821	573	1955
706984		1200	1222	4169	625	2133
706975		1400	1425	4862	729	2487
706964		1600	1629	5558	834	2846
706946		1800	1832	6251	938	3200
706907		2000	2036	6947	1042	3555
706949	750	300	369	1259	188	641
706945		400	492	1679	251	856
706956		500	615	2098	314	1071
706950		600	738	2518	377	1286
706920		700	861	2938	440	1501
706924		800	984	3357	502	1713
706905		900	1107	3777	565	1928
706890		1000	1230	4197	628	2143
706900		1100	1353	4616	691	2358
706896		1200	1476	5036	754	2573
706893		1400	1722	5875	879	2999
706882		1600	1968	6715	1005	3429

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Version number 1.0

Double Panel Type 21 (XG)



Type 21						
Code	Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
706876	300	800	609	2078	317	1082
706883		1200	913	3115	475	1621
706879		1600	1218	4156	634	2163
706909	450	800	848	2893	437	1491
706894		900	954	3255	491	1675
706930		1000	1060	3617	546	1863
706904		1100	1166	3978	601	2051
706942		1200	1272	4340	655	2235
706936		1400	1484	5063	764	2607
706913		1600	1696	5787	874	2982
706895		1800	1908	6510	983	3354
706947	600	400	536	1829	273	931
706962		500	670	2286	342	1167
706978		600	804	2743	410	1399
706958		700	938	3200	478	1631
706977		800	1072	3658	546	1863
706965		900	1206	4115	615	2098
706980		1000	1340	4572	683	2330
706963		1100	1474	5029	751	2562
706979		1200	1608	5486	820	2798
706970		1400	1876	6401	956	3262
706954		1600	2144	7315	1093	3729
706915		1800	2412	8230	1229	4193
706881		2000	2680	9144	1366	4661
706903	750	400	642	2191	326	1112
706910		500	803	2740	407	1389
706908		600	964	3289	488	1665
706892		700	1124	3835	570	1945
706891		800	1285	4384	651	2221
706886		900	1445	4930	733	2501
706885		1000	1606	5480	814	2777
706880		1100	1767	6029	895	3054
706884		1200	1927	6575	977	3334
706877		1400	2248	7670	1140	3890
706875		1600	2570	8769	1302	4442

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Version number 1.0

Double Convector Type 22 (DG)



Type 22						
Code	Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
706887	300	800	769	2624	394	1344
706922		1200	1153	3934	590	2013
706911		1600	1538	5248	787	2685
706898		2000	1922	6558	984	3357
706888	450	400	539	1839	274	935
706901		500	674	2300	343	1170
706917		600	808	2757	411	1402
706902		700	943	3218	480	1638
706935		800	1078	3678	548	1870
706928		900	1212	4135	617	2105
706952		1000	1347	4596	685	2337
706933		1100	1482	5057	754	2573
706961		1200	1616	5514	822	2805
706960		1400	1886	6435	959	3272
706953		1600	2155	7353	1096	3740
706926		1800	2425	8274	1233	4207
706919		2000	2694	9192	1370	4674
706959	600	400	684	2334	346	1181
706966		500	855	2917	432	1474
706986		600	1025	3497	518	1767
706968		700	1196	4081	605	2064
706985		800	1367	4664	691	2358
706973		900	1538	5248	778	2655
706989		1000	1709	5831	864	2948
706969		1100	1880	6415	950	3241
706990		1200	2051	6998	1037	3538
706981		1400	2393	8165	1210	4129
706971		1600	2734	9328	1382	4715
706948		1800	3076	10495	1555	5306
706927		2000	3418	11662	1728	5896
706931	750	300	617	2105	310	1058
706941		400	822	2805	414	1413
706951		500	1028	3508	517	1764
706957		600	1233	4207	620	2115
706938		700	1439	4910	724	2470
706940		800	1644	5609	827	2822
706921		900	1850	6312	931	3177
706932		1000	2055	7012	1034	3528
706906		1100	2261	7715	1137	3879
706929		1200	2466	8414	1241	4234
706912		1400	2877	9816	1448	4941
706897		1600	3288	11219	1654	5643

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Version number 1.0

Weight and water contents per metre length

		HEIGHT (mm)							
		300		450		600		750	
TYPE		Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	SS	9.09	1.7	13.9	2.42	18.7	3.0	23.5	3.85
21	SX	14	3.4	21.15	4.9	28.3	6.2	35.3	7.75
22	SD	16.3	3.4	24.85	5	33.4	6.2	42.05	7.6

Connections

All CenterRad Compact radiators are fitted with 4 - 1/2 inch BSP connections.


Operating pressures

Every radiator is tested to a pressure of 13 bar and is suitable for a working pressure of up to 10 bar.


Air vents

An air vent and plug are packed with every radiator.

Mounting positions, dimensions and wall brackets

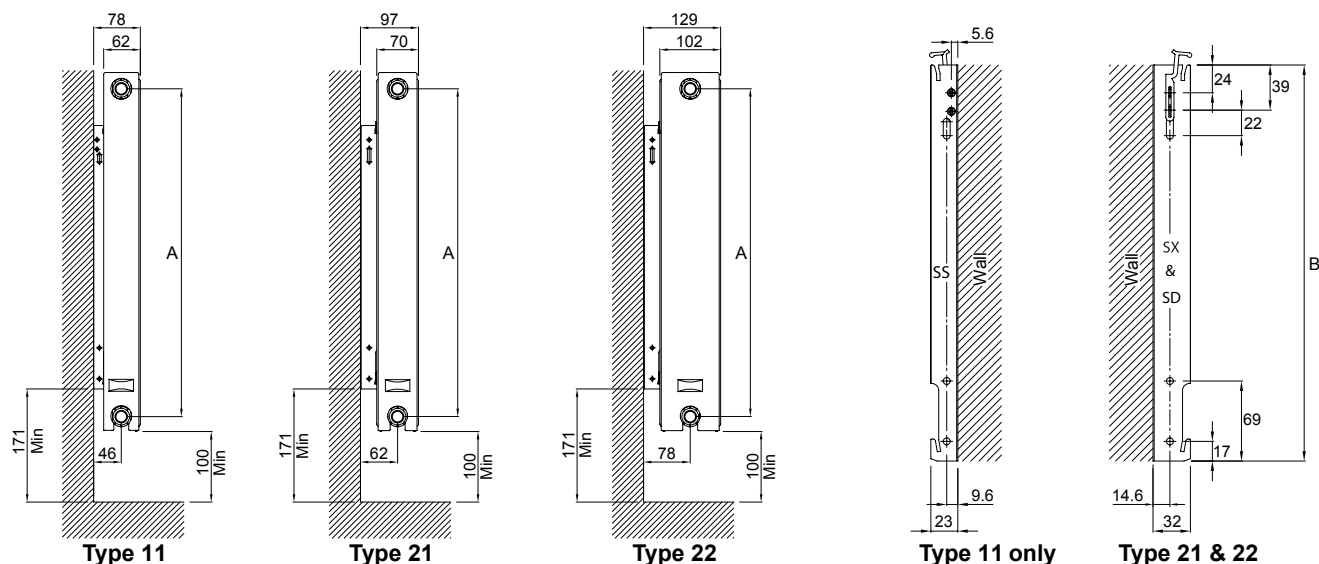

Nom. Height (mm)	Dim "A" (mm)	Dim "B" (mm)	Dim "C" (mm)
300	250	142	120
450	400	292	270
600	550	442	420
750	700	592	570

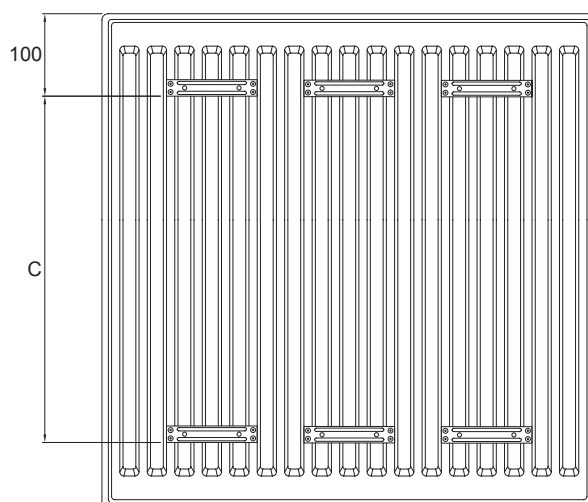

For more information on bracket dimensions and mounting positions see fitting instruction supplied with product or wolseley.co.uk

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. N.B. Only radiators 1800mm & 2000mm long have 3 sets of brackets as shown, with the 3rd set in the middle of the radiator. All dimensions in mm.

Version number 1.0