

PARKING DISTANCE CONTROL: LIST AND LOCATION OF COMPONENTS



Note, one or more warnings are present in this procedure



Equipment required

Diagnostic tool


1. LIST OF COMPONENTS

1- THE PARKING DISTANCE CONTROL EQUIPMENT CONSISTS OF:

- a pedestrian warning computer
- a pedestrian warning activation control

2. LOCATION OF COMPONENTS

1- PEDESTRIAN WARNING COMPUTER

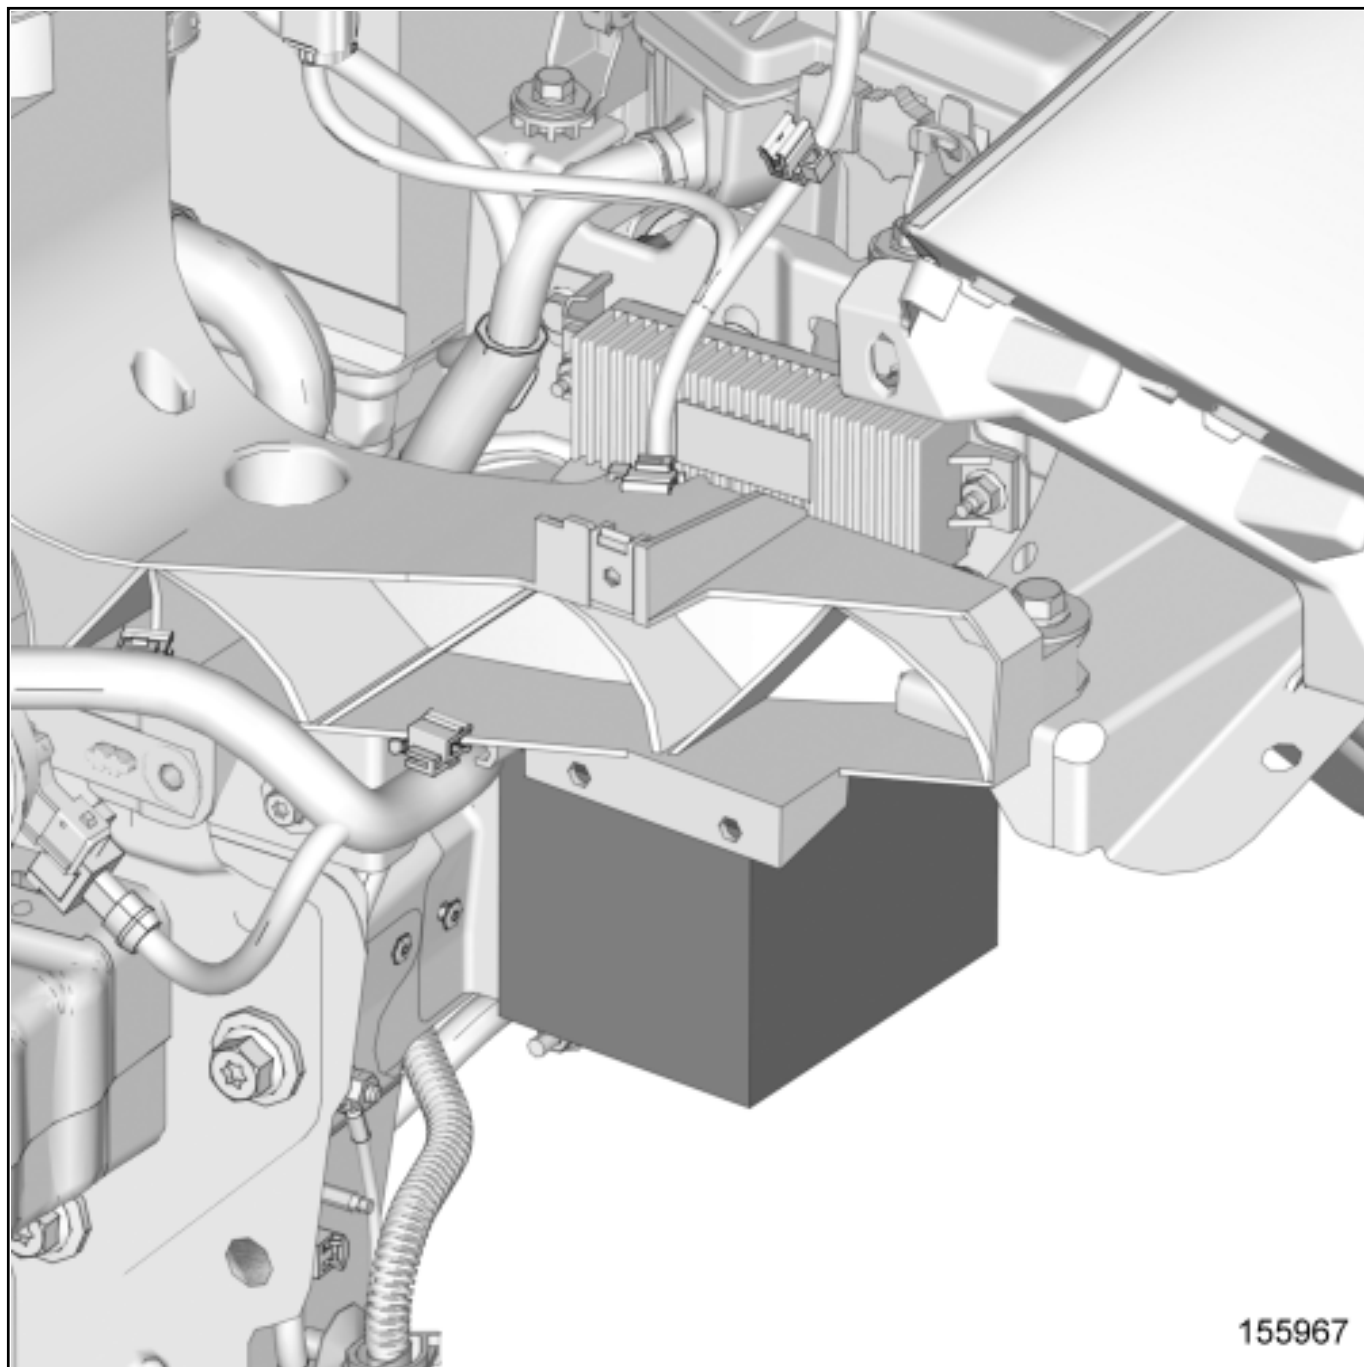

155967

WARNING



DANGER : Risk of serious injury due to short-circuiting or untimely triggering of an electrical system (pyrotechnic components, windscreen wiper motor, fan assembly etc.) following possible re-supply of the 12-volt supply circuit by the voltage converter.

Please follow the instructions regarding disconnection of the 12-volt supply circuit.

If the procedure fails, do not continue with your task and ask an employee who is qualified and authorised to work on a high-voltage onboard network to perform fault finding [Vehicle: Precautions for the repair](#) .


Disconnect the 12V supply circuit [12 V supply circuit : Lockout - Removal of lockout](#) .

Remove the front bumper [Front bumper assembly: Exploded view](#) .

Disconnect the pedestrian warning computer connector.

Remove the pedestrian warning computer.

2- PEDESTRIAN WARNING ACTIVATION CONTROL

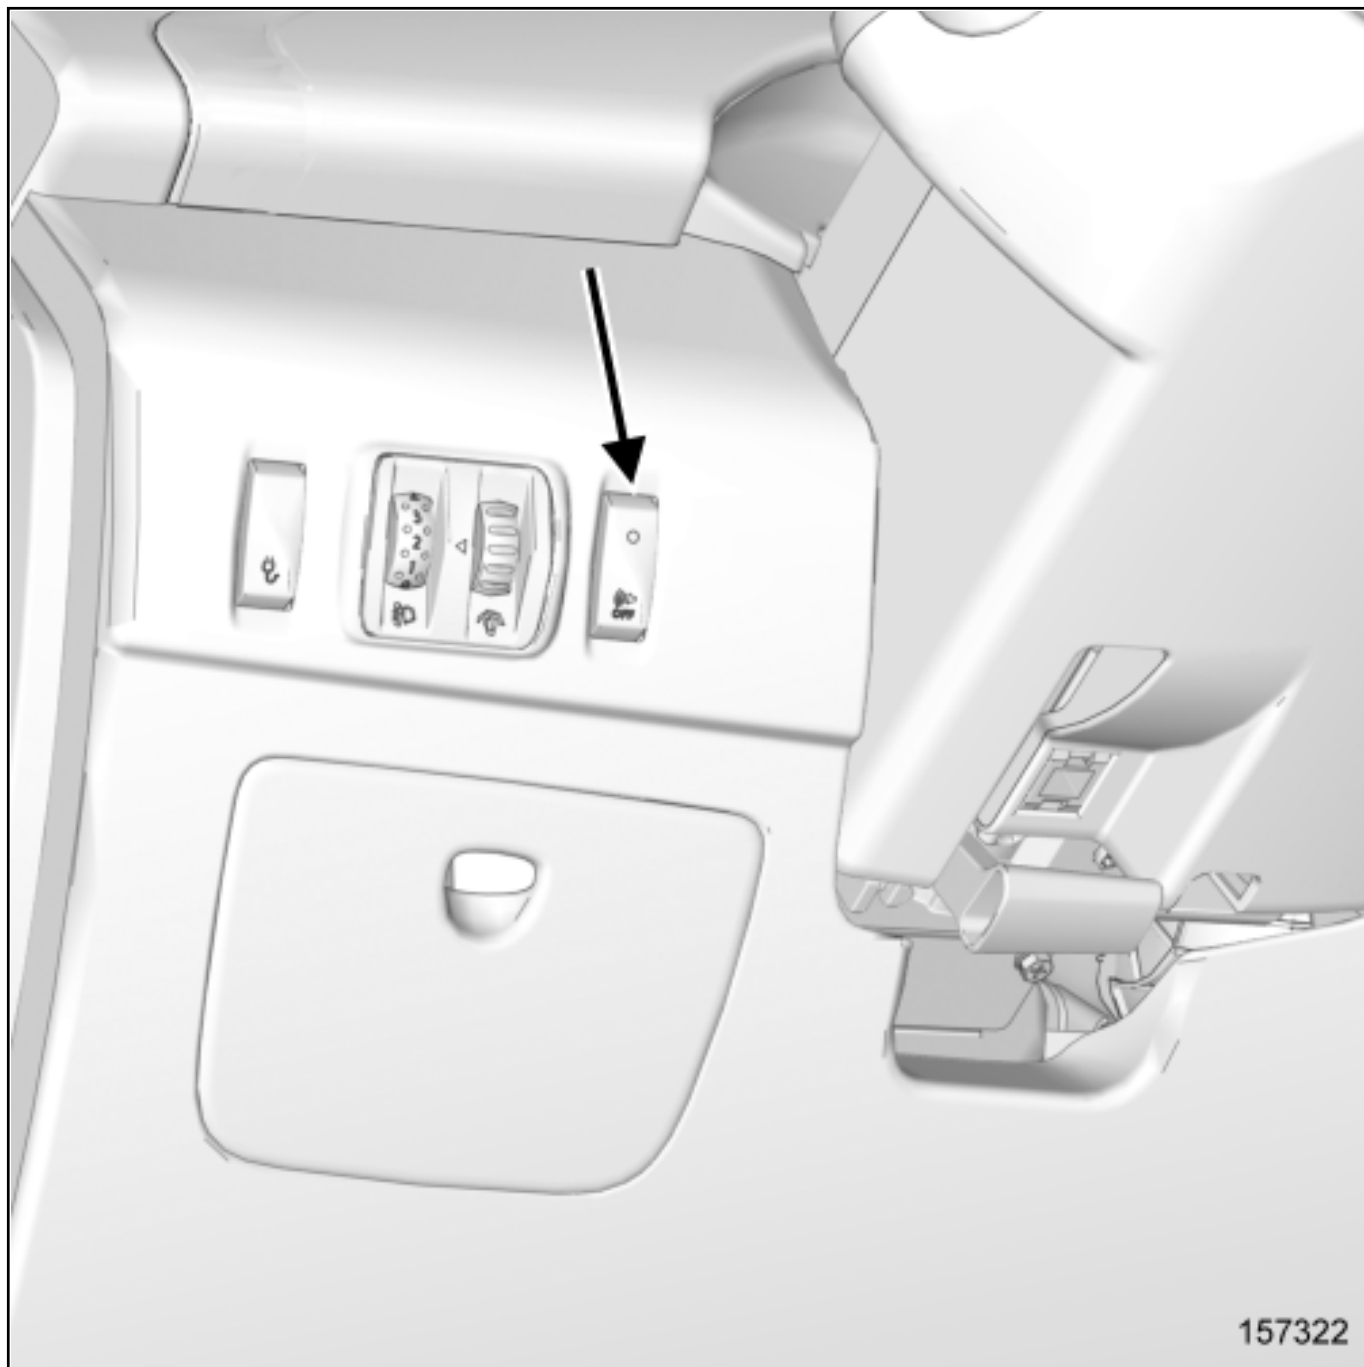

157322

cardiagn.com

Dashboard assembly: Exploded view

■ Apply the after repair procedure using the Diagnostic tool Diagnostic tool : Use :

-Computer concerned by the After repair procedure:

■ "UCH" ,

-Component controlled by this computer concerned by the After repair procedure:

■ "Horn control" .



