


Trade Double Section Ladder

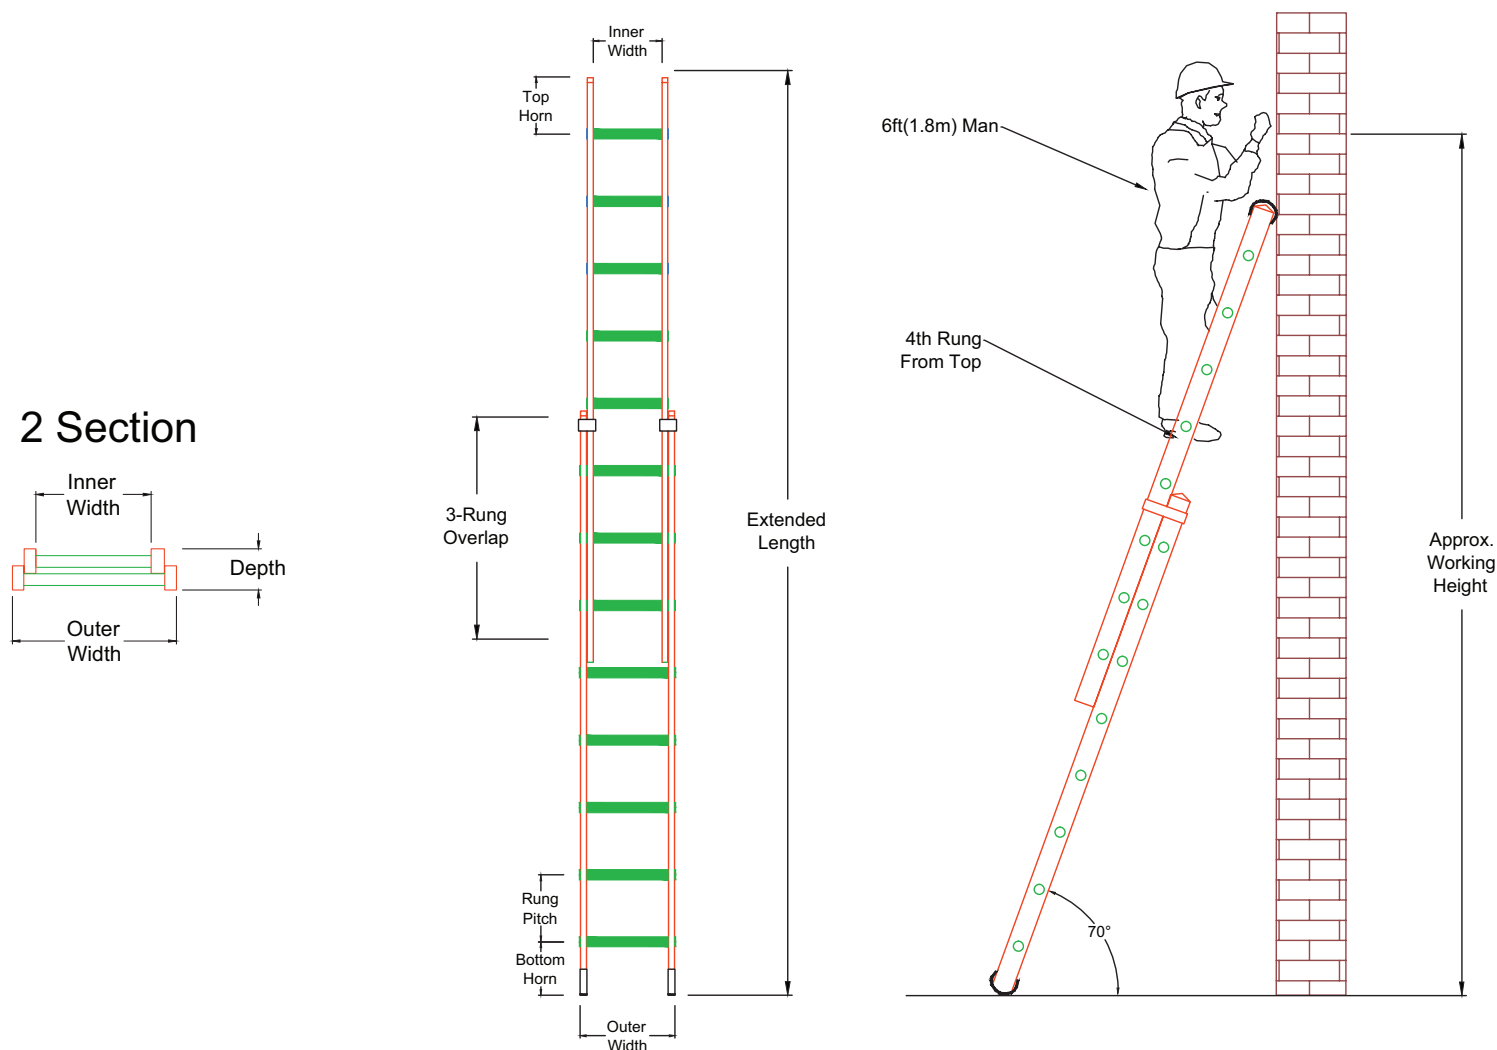

Common Dimensions

Top Horn	250
Bottom Horn	240
Rung Pitch	250
Inner/Outer Width	285/410

Product Dimensions

PRODUCT SKU	NOMINAL LENGTH (M)	APPROX. WORKING HEIGHT	LAST CLIMBING HEIGHT	RUNG COUNT	STORAGE LENGTH	EXTENDED LENGTH	STORED DEPTH	STILE WIDTH X DEPTH	WEIGHT (NETT KG)
1102-000	2.5	4,580	2,980	15	2,520	3,990	125	64 x 25	10.5
1102-001	3.0	5,580	3,980	19	3,020	4,985	125	64 x 25	12.3
1102-002	3.5	6,570	4,970	23	3,515	5,995	125	64 x 25	14.3
1102-003	4.0	7,585	5,985	27	4,020	6,995	135	73 x 25	18.8
1102-004	4.5	8,585	6,985	31	4,520	7,995	150	84 x 25	22.6
1102-005	5.0	9,580	7,980	35	5,020	9,000	150	84 x 25	24.9
1102-006	5.5	10,585	8,985	39	5,520	10,000	150	84 x 25	30.0

Technical Description

Commercial duty double extension ladders that can be split for use as single sections. The comfortable 'D' shaped twist-proof rungs are secured into rigid box section stiles for comfortable safe use.

- » Commercial strength box-section construction
- » Twist proof rung joint
- » Reduce fatigue with deep, comfortable 'D' rungs
- » Slip resistant high traction rungs
- » Sections separate for use as single ladders

Standards & Classification

- » Maximum Static Vertical Load 150kg
- » Conforms to BSEN131 & Kite Marked

Warranty

- » 3 Years

Shipping Dimensions

PRODUCT SKU	SHIPPING LENGTH	SHIPPING WIDTH	SHIPPING DEPTH	SHIPPING VOLUME (M³)	SHIPPING WEIGHT (GROSS KG)	BARCODE
1102-000	2,520	420	140	0.1482	10.5	5060169480513
1102-001	3,020	420	140	0.1776	12.3	5060169480520
1102-002	3,515	420	140	0.2067	14.3	5060169480537
1102-003	4,020	420	150	0.2533	18.8	5060169480544
1102-004	4,520	420	170	0.3227	22.6	5060169480551
1102-005	5,020	420	170	0.3584	24.9	5060169480568
1102-006	5,520	420	170	0.3941	30.0	5060169480575

Notes

All dimensions stated in mm unless marked otherwise.

Engineering tolerance +/- 10% or 10mm, whichever is greater.

Approximate working height is calculated as 1,600mm + Last Climbing Height (4th rung from the ladder top) or Platform Height.